

ELECTRIC STORAGE HOT WATER

QUANTUM ELECTRIC MODELS

4Q PREMIUM SERIES



STYLISH & DURABLE,
THE ELECTRIC PREMIUM RANGE




TECHNICAL SPECIFICATION

4Q PREMIUM SERIES

MODEL		25L	50L	80L	125L	160L	250L	315L	400L	
Storage Capacity		25L	50L	80L	125L	160L	250L	315L	400L	
Dual Handed Outlets		✓	✓	✓	✓	✓	✓	✓	✓	
Single Element (kW Rating)	1.9*	✓	✓	✓	✓	✓	✓	✓	✓	
	2.4*	✓	✓	✓	✓	✓	✓	✓	✓	
	3.6*	–	✓	✓	✓	✓	✓	✓	✓	
	4.8*	–	✓	✓	✓	✓	✓	✓	✓	
Max Temperature		82°C								
Electrical Supply		220-240V/50Hz								
Water Connections		3/4" BSP - 20mm								
PTR Valve Setting		1,400kPa	1,400kPa	1,400kPa	1,000kPa	1,000kPa	1,000kPa	1,000kPa	850kPa	
PLV Settings		1,100kPa	1,100kPa	1,100kPa	800kPa	800kPa	800kPa	800kPa	800kPa	
Nett (Empty) Weight		19Kg	24Kg	36Kg	50Kg	57Kg	77Kg	91Kg	110Kg	
Warranty		7 Years (Cylinder) - 1 Year (Parts & Labour)								
Installation		Indoor/Outdoor								

Note (*): Some heating elements are available only upon request.

DIMENSIONS									
A	Degree	65	59	58	90	90	90	90	90
B	Degree	26	26	23	31.5	23	31.5	31.5	31.5
D	mm	400	450	480	480	480	650	650	700
H	mm	455	690	955	1340	1615	1425	1735	1680
h	mm	90	90	90	90	90	95	95	95
h1	mm	188	420	686	1078	1338	1106	1406	1281
l1	mm	45	90	128	128	128	130	130	130

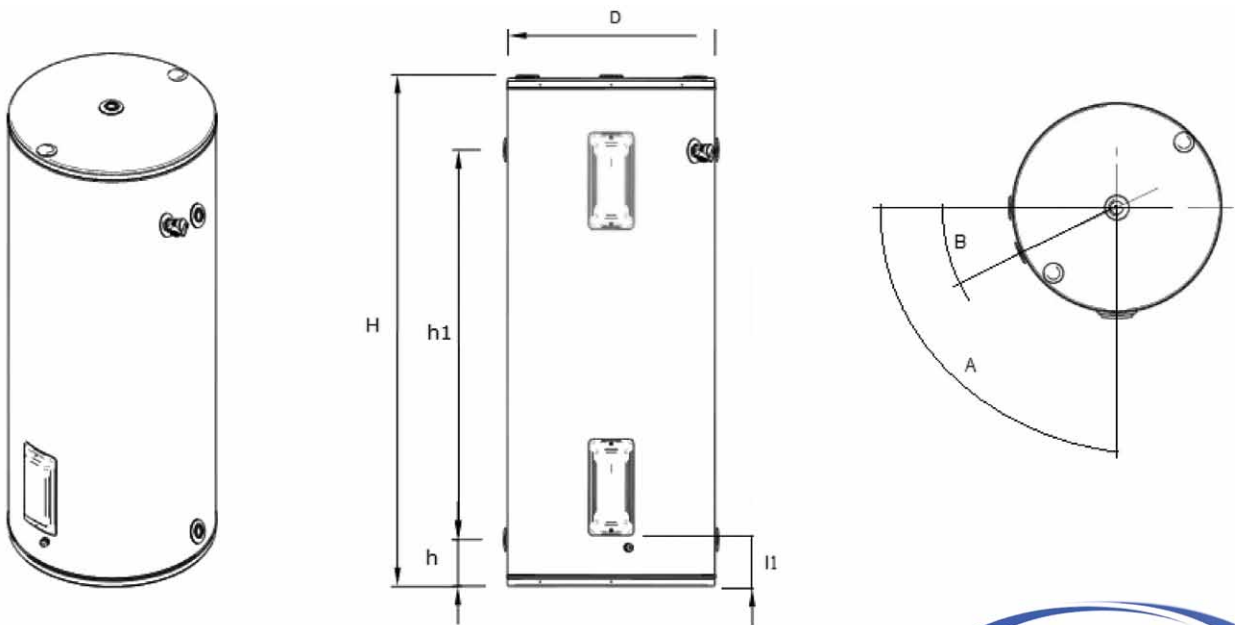

For more information please visit
www.quantumenergy.com.au
 or call us on 1800 383 888.

